





Pedestal Adjustment Instructions

1. Adjust the angle of the arm by loosening the adjustment knob (C). Adjust the angle and rotation of the pedestal (E) head by loosening the swivel-tightening knob (D).

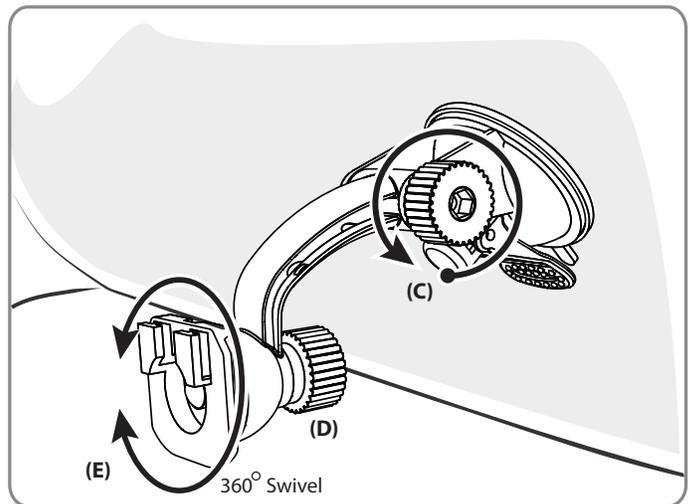


2. Attach the cradle (F) to the pedestal head (E) by sliding the Dual T-tabs on the head of the pedestal into the dual T-slots on the back of the cradle.

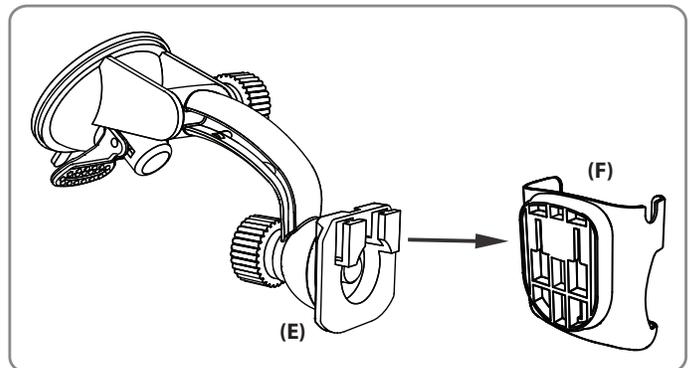


Windshield Installation

1. Choose the best location on vehicle to place the mount. **Do not place mount in or near an air bag deployment zone or where it will obstruct view of the road.**
2. Push the pedestal suction cup (A) firmly to the windshield. Flip the lever (B) down to secure the suction cup.

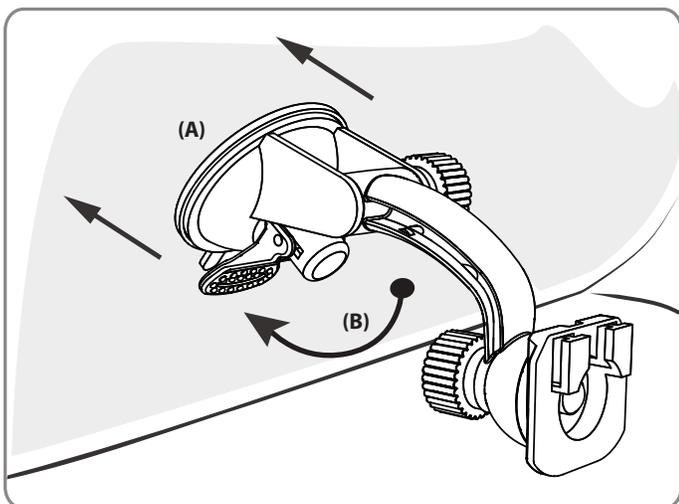

Dash Installation

1. Locate a safe, flat surface on the dash or console to mount the pedestal. Clean the dash with the alcohol pad provided. Let the dash surface dry before applying the adhesive disc (G).
2. Push the pedestal suction cup firmly to the disc (G). Flip the lever (H) down to secure the pedestal's suction cup to the top of the adhesive disc.

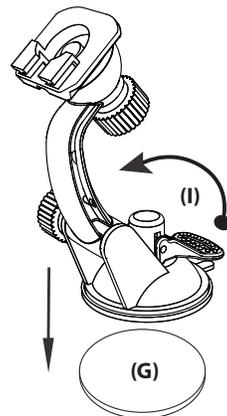

Safety Precautions

Do not install Arkon products over an air bag cover or within the air bag deployment zone. Arkon Resources, Inc. assumes no responsibility of liability for injury or death as a result of car crashes and/or air bag deployment.

Arkon Resources, Inc. is not responsible for any damages caused to your car, your device, or yourself due to the installation of this mounting solution.

ARKON
RESOURCES INC.

The Mobile Mounting Specialists™

Consumer Hotline:
(USA) (800) 841-0884
(INT'L) (626) 254-9005
Mon-Fri. 9am-5pm, PST

www.arkon.com
Arcadia, CA 91006 USA
Made in Taiwan

© Copyright 2007 Arkon Resources, Inc.